



Airless Parts Accessories




www.airlesspaintsprayerpump.com / www.dpairless.com

Airless Parts Accessories

DP-6370 Airless spray gun with tip & tip guard

Max.270bar / 3920psi pressure
Inlet connector: 1/4"NPSM, 1/4"PT, M16*1.5
Output connector: 11/16", 7/8"
4-finger trigger
Anodized aluminium casting gun body with light weight (0.62kgs).
Built-in airless filter could be easily replaced.
(standard filter included is 100mesh yellow color)
With Auto-cleaning reverse airless tip.
Swivel free inlet connector.



6370
6371
6372
6373

DP-6371 Airless spray gun with tip & tip guard

Max.270bar / 3920psi pressure
Inlet connector: 1/4"NPSM, 1/4"PT, M16*1.5
Output connector: 11/16", 7/8"
4-finger trigger
Anodized aluminium Forged gun body for light weight (0.58kgs) and high pressure .
Built-in airless filter could be easily replaced. (standard filter included is 100mesh yellow color)
With Auto-cleaning reverse airless tip.
Swivel free inlet connector.




DP-6372 Airless spray gun with tip & tip guard

Max.250bar / 3630psi pressure
Inlet connector: 1/4"NPSM, 1/4"PT, M16*1.5
Output connector: 11/16", 7/8"
4-finger trigger
aluminium gun body with light weight (0.56kgs)
Built-in airless filter (standard is 60mesh white color)
With Auto-cleaning reverse airless tip.
Swivel free inlet connector.



DP-6373 Airless spray gun with tip & tip guard


Max.270bar / 3920psi pressure
Inlet connector: 1/4"NPSM, 1/4"PT, M16*1.5
Output connector: 11/16", 7/8"
4-finger trigger
Zinc alloyed aluminum gun body with light weight (0.58kgs)
Built-in airless filter (standard is 100mesh yellow color)
With Auto-cleaning reverse airless tip.
Swivel free inlet connector.



www.airlesspaintsprayerpump.com/ / www.dpairless.com


6375
6376
6377
6374

DP-6375L Straight handle airless spray gun with swivel outlet, with tip & tip guard With 50cm extension pole



DP-6375 Straight handle airless spray gun with swivel outlet, with tip & tip guard

Max.270bar / 3900psi pressure
Inlet connector: 1/4"NPSM, 1/4"PT, M16*1.5
Output connector: 7/8"
4-finger trigger
Built-in airless filter (standard is 60mesh white color)
Straight design reduce the hand fatigue for long time spraying, and easy spray to any angle.

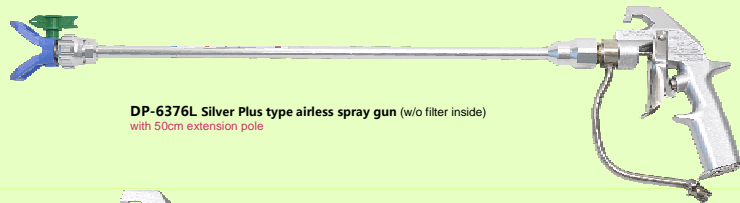

DP-6376L Silver Plus type airless spray gun (w/o filter inside) with 50cm extension pole



DP-6376 Silver Plus type airless spray gun (w/o filter inside)
Large fluid passing way for big painting project
Painting go through the tip nozzle directly, without touch to the needle or spring.
Reduce the parts worn or rusting.
2-finger or 4-finger types are both available.
Max.pressure: 345bar / 5000psi
Outlet thread: 11/16" or 7/8".
Inlet connector: 1/4"NPSM, 1/4"PT, M16*1.5

500bar high pressure airless gun



DP-6377 High pressure airless spray gun

Designed for pneumatic airless paint sprayer (without filter inside.)
max.pressure: 500bar / 7250psi
Inlet connector: 1/4"NPSM, 1/4"PT, M16*1.5
Outlet thread: 7/8", 11/16", M16*1.5



DP-6374 High pressure airless spray gun

Designed for pneumatic airless paint sprayer (with filter inside.)
max.pressure: 500bar / 7250psi
Inlet connector: 1/4"NPSM, 1/4"PT, M16*1.5
Outlet thread: 7/8", 11/16", M16*1.5

DP-637TT Reversible Airless tips & tip gasket combo kit

Stainless steel shank + Tungsten carbide orifice
Nylon + stainless steel tip gasket, Durable and easily reversed for cleaning.
Tip Shank Diameter: 11.1mm
Max.5000 PSI (345 BAR)
This tip could fit Titan, Wagner, ASM, Airlessco etc.
Most kind of airless guns.
Guaranteed perfect quality, fine atomization. Over 5000 m2 lifetime.
Tip size available: from 0.011" to 0.027" (2xx to 6xx)
Best quality, best selling.



DP-637G

DP-637TS Reversible Airless tips & tip gasket combo kit

Airless tip in RAC V type, used for old Graco guns.
Stainless steel shank + Tungsten carbide orifice
Nylon + stainless steel tip gasket, Durable and easily reversed for cleaning.
Tip Shank Diameter: 11.1mm
Max.5000 PSI (345 BAR)
Tip size available: from 0.011" to 0.035" (2xx to 6xx)



DP-637TX Reversible Airless tips & tip gasket combo kit

Airless tip in RAC X type, used for new Graco contractor guns.
Stainless steel shank + Tungsten carbide orifice
New material tip gasket, for easily reversed for cleaning.
Tip Shank Diameter: 11.4mm
Max.5000 PSI (345 BAR)
Guaranteed perfect quality, fine atomization. Over 5000 m2 lifetime.
Tip size available: from 0.011" to 0.027" (2xx to 6xx)



DP-637TW Reversible Airless tips & tip gasket combo kit

Stainless steel shank + Tungsten carbide orifice
Nylon + stainless steel tip gasket, Durable and easily reversed for cleaning.
Tip Shank Diameter: 11.1mm
Max.5000 PSI (345 BAR)
This tip could fit Wagner, Titan, ASM, Airlessco etc.
most kind of airless guns.
Tip size available: from 0.011" to 0.031" (2xx to 6xx)



DP-637TP High pressure Airless tips & tip guard combo kit

High pressure airless tips & safety guard for pneumatic airless system
Max.7250 PSI (500 BAR)
Thread size: 7/8", M16*1.5 or 11/16"



637T

Airless tips nozzles

637FM
637FT
637FB
637SF

Chart for airless tips

Orifice Size	Fan Width - Inches						Flow Rate		Application	Filter
inch	4" - 6" Fan	6" - 8" Fan	8" - 10" Fan	10" - 12" Fan	12" - 14" Fan		gpm	L/min		
0.011"	211	311	411	511	611		0.12	0.45	Stain or Lacquer	150mesh (red)
0.013"	213	313	413	513	613		0.18	0.68		
0.015"	215	315	415	515	615		0.24	0.91	Oil Base Paint	100mesh (yellow)
0.017"	217	317	417	517	617		0.31	1.17	Latex Paint	100mesh (yellow)
0.019"	219	319	419	519	619		0.38	1.44	Acrylic / Enamel	60mesh (white)
0.021"	221	321	421	521	621		0.47	1.78		
0.023"	223	323	423	523	623		0.57	2.16	Heavy latex	60mesh (white)
0.025"	225	325	425	525	625		0.67	2.54		
0.027"		327	427	527	627		0.77	2.91	Elastomeric / Blockfiller / Primer	30mesh (green)
0.029"		329	429	529	629		0.9	3.41		
0.031"		331	431	531	631		1.03	3.9		
0.033"		333	433	533	633		1.17	4.43		
0.035"		335	435	535	635		1.31	4.96		

Example: For a tip with a .017" orifice and a 10" - 12" fan pattern, order DP637T-517 Reversible Tip. Fan width of a spray pattern is measured at 12" from the surface.

Airless filters



DP-637FM Airless filter for pump manifold
Size: 27mm diameter, 144mm height
Filter with wing: Fit Graco / Airlessco / Asturo etc.
Filter without wing: Fit Larius, Titan, etc.
DP-637FM30 30 mesh (637FM30W without wing)
DP-637FM60 60 mesh (637FM60W without wing)
DP-637FM100 100 mesh (637FM100W without wing)
DP-637FM150 150 mesh (637FM150W without wing)
DP-637FM200 200mesh (637FM200W without wing)



DP-637FT Airless filter for pump manifold
Size: 27mm diameter, 72mm height
Filter with wing: Fit Graco / Larius etc.
DP-637FT30 30 mesh
DP-637FT60 60 mesh
DP-637FT100 100 mesh
DP-637FT150 150 mesh
DP-637FT200 200mesh



DP-637FB Airless manifold filter for Graco pumps
Size: 20.6mm diameter, 91mm height
DP-637FB60 black (60 mesh)
DP-637FB100 blue (100 mesh)



DP-637SF Suction filter
Size: 3/4", 1", 1-1/4",
One-layer or Two-layers are available.

www.airlesspaintsprayer-pump.com/ / www.dpairless.com

Airless filters for spray gun
Stainless steel + welded
(A. Plug-in type, B. Thread screw-in type)

DP-637F150 red (150 mesh)
(Suitable for tip size: 0.009", 0.011", 0.013")

DP-637F180 red (180 mesh)
(Suitable for tip size: 0.009", 0.011", 0.013")



Airless filters for spray gun
Stainless steel + welded
(A. Plug-in type, B. Thread screw-in type)

DP-637F100 yellow (100 mesh)
(Suitable for tip size: 0.013", 0.015", 0.017")



Airless filters for spray gun
Stainless steel + welded
(A. Plug-in type, B. Thread screw-in type)

DP-637F60 white (60 mesh)
(Suitable for tip size: 0.019", 0.021", 0.023", 0.027")

DP-637F80 white (80 mesh)
(Suitable for tip size: 0.019", 0.021", 0.023")



Airless filters for spray gun
Stainless steel + welded
(A. Plug-in type, B. Thread screw-in type)

DP-637F30 Green (30 mesh)
(Suitable for tip size: 0.027", 0.029", 0.031", 0.033")



DP-637FG Airless filter for Graco guns
Size: 7.3mm diameter, 111.5mm height
DP-637FG60 black (60 mesh)
DP-637FG100 blue (100 mesh)
Fit Graco (Screw-in end)



637F
637FG

Airless filters

Stainless steel + welded

A. Plug-in type,
B. Thread screw-in type

DP-637F30 #
Green (30 mesh)

DP-637F60 #
white (60 mesh)

DP-637F80 #
white (80 mesh)

DP-637F100 #
yellow (100 mesh)

DP-637F150 #
red (150 mesh)

DP-637F180 #
red (180 mesh)

www.airlesspaintsprayer-pump.com/ / www.dpairless.com

637LT
637LS
637PR
637S



DP-637LT Extension pole for airless spray gun (Aluminium material)

DP-637LT15 15cm extension pole
DP-637LT30 30cm extension pole
DP-637LT50 50cm extension pole
DP-637LT75 75cm extension pole
DP-637LT100 100cm extension pole
DP-637LT150 150cm extension pole

DP-637LS Extension pole with swivel safety guard (tip not included)

DP-637LS15 15cm extension pole with swivel safety guard
DP-637LS30 30cm extension pole with swivel safety guard
DP-637LS50 50cm extension pole with swivel safety guard
DP-637LS75 75cm extension pole with swivel safety guard
DP-637LS100 100cm extension pole with swivel safety guard

DP-637LG Extension pole with safety guard (tip not included)

DP-637LG15 15cm extension pole with safety guard
DP-637LG30 30cm extension pole with safety guard
DP-637LG50 50cm extension pole with safety guard
DP-637LG75 75cm extension pole with safety guard
DP-637LG100 100cm extension pole with safety guard

Extension poles
Safety base



DP-637PR Paint Roller (for airless sprayer)

With extra long tube (150cm) for high rolling jobs
Ideal for refinishing your house.
Recommend to connect with DP637S straight-hand airless spray gun



Safety Guard



(For graco RAC X tips)

DP-637S Safety guard / tip holder
Size: 7/8", 1 1/16"
Max. 5000 PSI (345 BAR)



637H
637CS
637SP
637C

2-layers WIRE braided (Standard SAE100 R7)

Model	Size	Diameter (in/out)	Working pressure	Bursting pressure
	inch	mm	Bar psi	Bar Psi
637H01	1/4"	6.3X13.3	400 5800	1450 21000
637H02	5/16"	7.9X14.9	380 5500	1300 18850
637H03	3/8"	9.5X16.7	350 5070	1160 17400
637H04	1/2"	12.7X19.8	310 4490	1050 15900

2-layers FIBRE braided (Standard SAE100 R7)

Model	Size	Diameter (in/out)	Working pressure	Bursting pressure
	inch	mm	Bar psi	Bar Psi
637H05	1/4"	6.3X12.7	340 4930	1360 19270
637H06	5/16"	7.9X15.0	310 4495	1240 17980
637H07	3/8"	9.5X18	250 3625	1000 14500
637H08	1/2"	12.7X21.6	220 3190	880 12760

DP-637H High pressure airless painting hose (with spring protected at both ends)

Material: nylon inner tube, Polyurthane covered.

Co-ol: Bl, e, Red, Ye lctv, Black

UL approved.



DP-637SG Swivel Hose Connector

Size: 1/4"*1/4", 3/8"*3/8", 1/4"*3/8" etc.
Thread in BSP, PT, NPSM, and Metric size
Available in female or male end.



Airless Hose
Connectors

DP-637SP

Swivel free connector for extension pole
Size: 7/8", or 1 1/16"
Max.pressure: 250bar



DP-637C Hose Connector

Size: 1/4"*1/4", 3/8"*3/8", 1/4"*3/8" etc.
Thread in BSP, PT, NPSM, and Metric size
Material: steel



DP-637CS Swivel free connector for airless gun or machine
Material: Aluminum & stainless steel
Max.pressure: 250bar

Parts
For
pump



Inlet valve for diaphragm pump



Fluid pump for DP6695



Pressure gage

Parts
For
pump

Professional

Airless
Accessories



Outlet valve




Piston rod & v-packings
for piston pump DP6695



Piston rod & v-packings
for pneumatic airless K301

Airless
Accessories

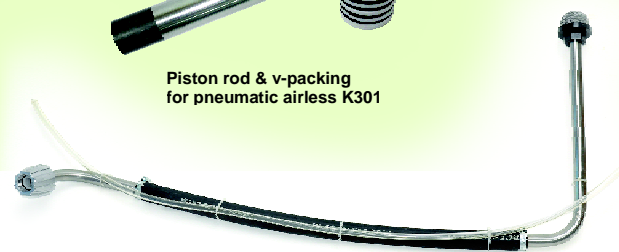


Suction system for diaphragm pump



Pressure control valve



Inlet valve for DP6820

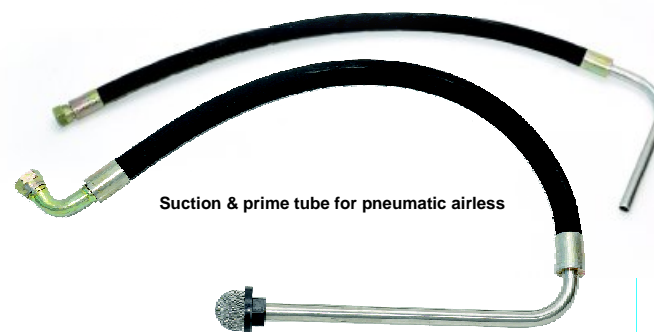

Suction & prime tube for pneumatic airless